




EV Seal 500



Technical Data Sheet

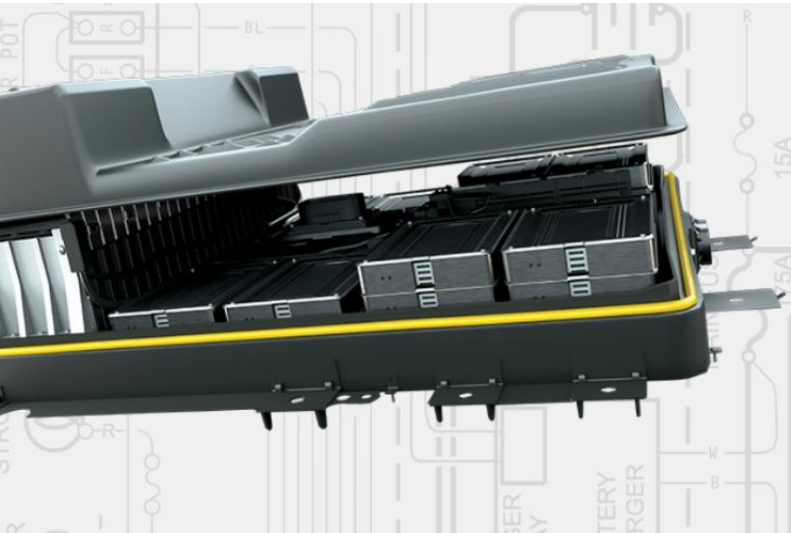


Battery Pack Gasket & Sealant

EV Seal 500 is a thermal plastic hot melt PSA designed for use in gasketing and sealing applications. It is especially suitable for sealing battery pack modules where accessibility and serviceability are a high priority. With the resealable nature of this material, repeated opening and closing of a battery enclosure is simple, easy, and reliable. The EV Seal 500 offers a robust solution for preventing dust & moisture intrusion to any enclosure.

This material is recommended for use with steel, aluminum, and cast iron.

Technology/Base:	Block Co-Polymer
Type of Product:	Re-sealable Gasket
Components:	One Component
Curing:	Non-Reactive
Appearance / Color:	Gray
Consistency:	Hot Melt

EV Seal 500 Temperature viscosity profile

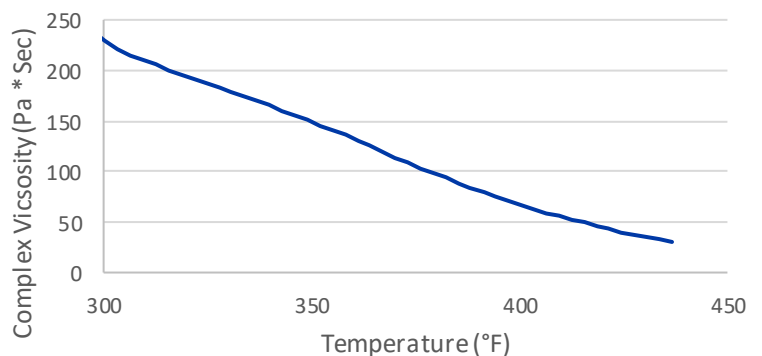

* Recommend operation dispense temperature of 350 – 400 F



Features and Benefits



- One component requires no mixing
- Thermoplastic nature allows for ease of use
- Excellent resistance to dust or moisture intrusion
- Wide Service Temperature Range (-40°C to 110°C)
- Re-sealable capabilities improve serviceability of enclosure
- Suitable for easy processing with proper hot melt dispense systems
- Outstanding absorption of shock, vibration, and CTE
- End of life recyclability



Plug into our EV Adhesive Technology

Download our app to learn more



EV Seal 500



Technical Data

Rheology	Value	Condition/Method
Viscosity	32,000 cPs	Brookfield #29; 20RPM; @200°C
Specific Gravity	0.94	Water Displacement
Mechanical Properties		
Tensile Strength	23.1 PSI	ASTM D412 "Die C"
Elongation	500%	
Cone Pen	120 ddm	ASTM D217 (150g added wt)
Compression Set	90% Recovery	1 wk at RT (50% Compression)
	50% Recovery	1 wk at 80°C (50% Compression)
Force to Compress	45 lbf	ASTM (C972) (50% Compression)
Rebound-Post Force to Compress	99%	5 minutes
	99%	24 hours
Adhesion Testing		
Tensile Strength	16 PSI	Cross Pluck at 0.2"/min
90° Avg. Peak Load	1 PLI	24 hr after at 12"/min



General Information

1. Coating surface area should be clean and free of any oils, residues, dust, or any other contaminants
2. Apply to primary substrate. Primary substrate is the preferred substrate in which the material will remain permanently adhered. Secondary substrate will be married to the primary and material will release from during servicing.
3. Apply using appropriate Hot Melt dispensing equipment. Adjust heating and pressure parameters to achieve appropriate flow rate.
4. Allow 5 minutes for material to cool to room temperature prior to assembly of enclosure.



Handling and Clean-Up

Material can typically be peeled or manually removed by hand easily, however, if necessary, mineral spirits can be used to remove excess residue.



Typical Packaging

Sample Cartridges: 310mL
 Sample Rolls: Various Dimension
 Pails: 5 gal
 Drums: 55 gal



Storage and Shelf Life

Product should be stored at temperature between 8°C to 28°C in the unopened container in a dry location.

Shelf Life: 2 years from date of manufacture.



Safety and Disposal

Please refer to the SDS for product safety and disposal instructions.

Avoid contact with skin and eyes. Product will irritate eyes if contact occurs. Skin irritation is possible on prolonged or repeated contact.

Note:

The values noted in this data sheet are typical properties only and are not intended to be used as material specifications. For assistance in writing a material specification please contact H.B. Fuller for future details.

H.B. Fuller Company
 4401 Page Ave.
 Michigan Center, MI 49254

(517) 764-0334

www.hbfuller.com

© H.B. Fuller Company, 2022

IMPORTANT: The information, specifications, procedures and recommendations provided (information) are based on our experience and we believe this to be accurate. No representation, guarantee or warranty is made as to the accuracy or completeness of the information or that use of the product will avoid losses or damages or give desired results. It is users sole responsibility to test and determine the suitability of any product for the intended use. Tests should be repeated if materials or conditions change in any way. The user is advised to review the specific context of the intended use to determine whether the users intended use violates any law or infringes upon any patent(s). No employee, distributor or agent has any right to change these facts and offer a guarantee of performance.

Unless otherwise noted, trademarks are property of H.B. Fuller Company or one of its affiliated entities.

NOTE TO USER: by ordering/receiving product you accept the H.B. Fuller General Terms and Conditions of Sale applicable in the region. Please request a copy if you have not received these. These Terms and Conditions contain disclaimers of implied warranties (including but not limited to disclaiming warranties of fitness for a particular purpose) and limits of liability. All other terms are rejected. In any event, (1) the total aggregate liability of H.B. Fuller for any claim or series of related claims however arising, in contract, tort (including negligence), breach of statutory duty, misrepresentation, strict liability or otherwise, is limited to replacement of affected products or refund of the purchase price for affected products. (2) H.B. Fuller shall not be liable for loss of profit, loss of margin, loss of contract, loss of business, loss of goodwill or any indirect or consequential losses arising out of or in connection with product supply. (3) Nothing in any term shall operate to exclude or limit H.B. Fullers liability for fraud, gross negligence or for death or personal injury caused by negligence, or for breach of any mandatory implied terms unless permitted by law.